


		FineVu GX1600	
		4K + QHD 2CH	
		Front	Rear
LCD & Touch Panel		Non-LCD	
Image Sensor		8M pixels CMOS IMX678, 1/1.8"	5.0M pixels CMOS IMX335, 1/2.8"
Resolution		4K (3840*2160)	QHD (2560*1440)
Frame		[Standard] : 30fps, 15fps / Parking : 30fps, 15fps [Smart Time Lape] : 6fps / Parking : 2fps	
Encoding	Video	H.264 Main Profile	
	Voice	AAC	
Angle		146°	135°
File Container		MP4	
File System		Novatek	
Memory		Micro SD Card - 64GB/128/256GB	
Voice Recording		Built in	
Speaker		Built in	
LED		Security LED : White Status LED 3Color : R/G/B 	Security LED : White
Acceleration sensor		3-axis acceleration sensor	
Dimension		96.5 x 71.7 x 26.5 mm	46.85 x 29.9 x 36.5 mm
Weight		172g	36g
ADAS		Start Notice of the Front vehicle (FVMA) : supported Forward Collision Warning (FCWS) : supported Lane Departure Warning (LDWS) : supported Pedestrian Collision Warning (PCWS): supported Virtual Bumper (uFCWS): supported Right Lane Change Assist (BSD(R)): supported Left Lane Change Assist (BSD(L)): supported Rear Collision Warning (RCWS): supported	
Parking Mode		Y	
Thermal Protection		Y (Parking mode only)	
Operational Temperature		-10°C ~ 60°C	
Storage Temperature		-20°C ~ 70°C	
Low Voltage Cut-Off		Y	
PC Viewer		Y	
Available Features		Auto Night Vision	FineVu CLOUD&Wi-Fi App
		HDR	Format Free 2.0

	AI Heat Detection	Speed Camera Alert
	Smart Time Lapse	Quick Booting
	On Time Allert	High Temperature Protection
	Driving Rest Guide	Low Voltage Cut-Off
	OSD Setting (Front)	In-App. Live View/Video Replay
	Back Channel LED Configuration	Installation Angle Guide

Product Image




Components

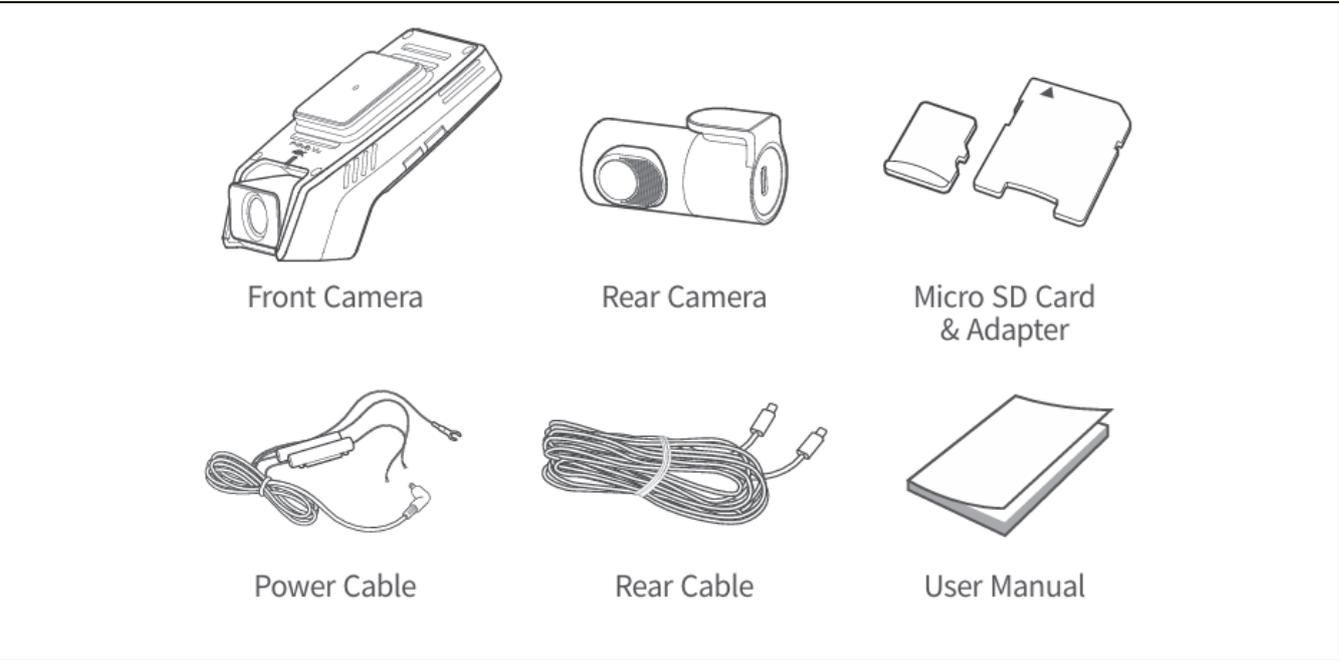

Optional Accessories




High capacity
Micro SD card

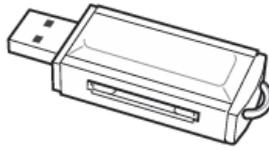


USB SD card reader



CPL filter

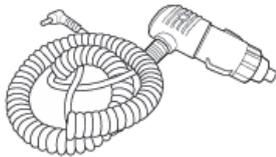

Cigarette
lighter power cable

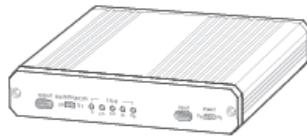

External Battery Pack